




Corridor® Power Stripper S 708

High-performance universal floor stripper

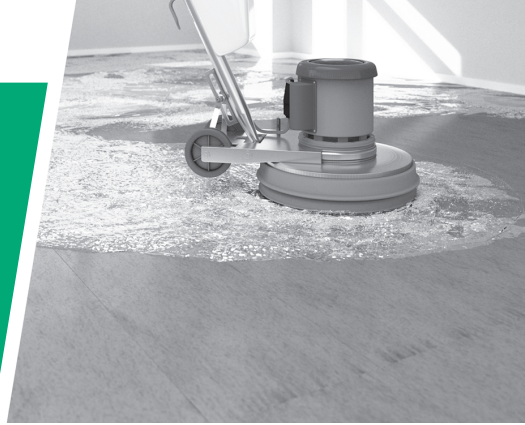

Area of application

- For water-resistant, alkali-sensitive elastic floor coverings such as linoleum, elastomer coverings and PVC
- For the removal of heavy-duty removable, multi-coated, metal-cross-linked coatings and floor finishes as well as coatings and floor finishes that are free of metal salt

Product properties

- Universally applicable
- Excellent removal capacity for encrustations and compacted floor finishes
- Fast effectiveness and residue-free removal of coatings
- Highly efficient due to economical dosing
- Very good material compatibility
- Low-foaming
- Very good wetting capacity for an optimal surface effect
- Time-saving and powerful due to special solubilizers

Application and dosage

- Always use cold water.
- Spread the cleaning solution on the floor.
- Let it briefly take effect.
- With a single-disc machine or scrubber dryer and a suitable pad or brush, thoroughly clean the floor covering.
- Soak up loosened dirt.
- Rinse the floor covering with clean water.
- Soak up rinse water.
- Consumption: 100 - 250 ml / per m²



1 - 2,5 l /
10 l water

- Apply fresh application solutions and consume them within 24 hours at the latest.

Note


- Check for material and colour compatibility.
- Not suitable for asphalt or bitumen coverings.
- Do not mix with other cleaning agent concentrates or cleaning products.
- Before processing, turn off heat sources (underfloor heating, heating, hot supply air).
- When used in the machine, the tanks should be cleaned and rinsed regularly.
- Changes or variations in colour of the product do not impact on the quality. The product image may differ in colour and shape from the original.
- **Safety:** Hazard statements and safety precautions can be found in the relevant safety data sheet, which is available at www.buzil.com.
- **Storage:** Always keep containers closed. Store at room temperature in the original container. Consume opened containers within 9 months.
- **Environmental:** Feed residual emptied containers to the dual system. For detailed information see environmental information.

Further information

- **Product colour:** colourless - light yellow
- **GISBAU code:** GG 50
- **UFI code:** H6X0-80GJ-U00H-RT7A
- For professional use only.

Sales units

- S708-0005RA: 1 x 5 l canister



Remark: Some products may not be available in all territories. Please talk to your customer service representative.

The data in our product information sheets are based on our experience and careful investigations, and correspond to our present state of knowledge. We are, however, not able to examine and influence in detail the varying conditions for usage and materials, and those at premises where products are to be used. For this reason, we can only provide general information on usage. The quality of the work depends on expert assessment of the premises where products are to be used and how they are in fact employed by the user. In the case of doubt, the latter is obliged at all times to test the compatibility of the material to be treated with the Buzil product on an inconspicuous area or to obtain relevant advice on application technology. Liability for incomplete or incorrect data in our product information sheets shall only be assumed in cases of negligence caused by gross negligence or intent; any claims arising from the Product Liability Act shall remain unaffected. All previous product information shall lose its validity through the above listed product information.